

Produktdatablad

HQI-TS 70 W/NDL

POWERSTAR HQI-TS EXCELLENCE | Metallhalogenlampor med kvartsteknologi för slutna armaturer



Tekniska data


Elektriska data

ZLDV_PFC capacitor at 50 Hz [AGGR]	12 μ F
ZLDV_Ignition voltage [AGGR]	13.3 kVp
ZLDV_Nominal current [AGGR]	0.95 A

Fotometrisk data

ZLDV_Rated LLMF at 2,000 h [AGGR]	0.92
ZLDV_Rated LLMF at 4,000 h [AGGR]	0.9
ZLDV_Rated LLMF at 6,000 h [AGGR]	0.85
ZLDV_Rated LLMF at 8,000 h [AGGR]	0.78
ZLDV_Rated LLMF at 12,000 h [AGGR]	0.73
ZLDV_UV protection [AGGR]	Yes
ZLDV_Luminous flux [AGGR]	6100 lm

Mått



ZLDV_Light center length (LCL) [AGGR]	57,0 mm
ZLDV_Product weight [AGGR]	17.00 g
ZLDV_Overall length [AGGR]	117.00 mm

Temperaturer och driftsförhållanden

ZLDV_Maximum permitted pinch temperature [AGGR]	350 °C
---	--------

Livslängder

ZLDV_Lifespan B50 [AGGR]	12000 h
--------------------------	---------

Tillägg produktdata

ZLDV_Design / version [AGGR]	Clear
------------------------------	-------

Produktdatablad

ZLDV_Mercury content [AGGR]	10.6 mg
Bortskaffande enl. WEEE-direktivet	Ja

Användningsområden

ZLDV_Burning position [AGGR]	p45
ZLDV_Enclosed luminaire required [AGGR]	Yes
ZLDV_Hot restart [AGGR]	Yes

Certifikat och Standarder

ZLDV_Energy efficiency class [AGGR]	G
ZLDV_Energy consumption [AGGR]	83.00 kWh/1000h

Landspecifika kategorier


ZLDV_ILCOS [AGGR]	MD/UB-70/842-H/E/SL-RX7s-19/117/H
-------------------	-----------------------------------

Environmental information


Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	22-05-2022
Primary Article Identifier	4008321678324
Declaration No. in SCIP database	In work

Systemgaranti

Tillsammans med OSRAM POWERTRONIC förkopplingsdon erbjuder vi en utökad systemgaranti för de allra flesta av våra ljuskällor.

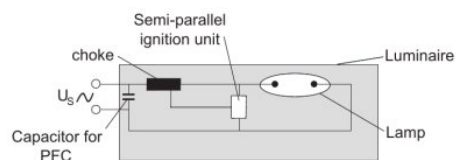


OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH SEMI-PARALLEL IGNITION UNIT

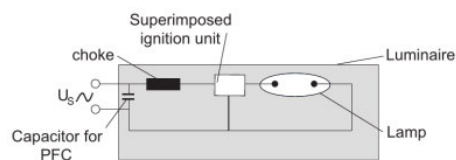


OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH A SUPERIMPOSED IGNITION UNIT

Produktdatablad

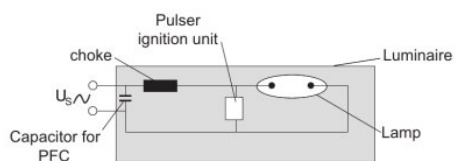

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH PULSE IGNITION UNIT

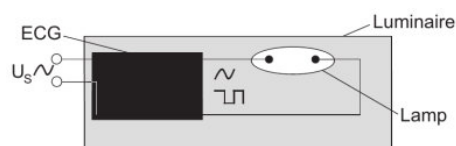

ELEKTRONISK OPERATION OF HIGH INTENSITY DISCHARGE LAMPS

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistiska data

Produktnummer	Produktbeskrivning	Förpackningsenhet (Styck/Enhet)	Dimensioner (längd x bredd x höjd)	Volym	Bruttovikt
4008321678324	HQI-TS 70 W/NDL	Transportförpackning g 12 Pieces Kapsel	149 mm x 136 mm x 118 mm	2.39 dm ³	410.00 g

Produktkoden gäller minsta tillåtna beställningskvantitet. En transportförpackning kan innehålla en eller flera produkter. Vid orderläggning, vänligen ange en eller flera transportförpackningar.

Referenser / Länkar

För mer information om systemgarantivillkoren se
▶ www.osram.com/system-guarantee

Friskrivningsklausul

Kan ändras utan föregående notifiering. Felaktigheter och försummelse undantagna. Se alltid till att använda den senaste utgåvan.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

HQI-TS 70 W/NDL

POWERSTAR HQI-TS EXCELLENCE | Metallhalogenlampor med kvartsteknologi för slutna armaturer

Produktnamn	Produktnamn elektroniskt förkopplingsdon	EAN
HQI-TS 70 W/NDL	PT-FIT 70/220-240 I	4008321377685
	PT-FIT 70/220-240 S	4008321386649
	PTi 70/220-240 I	4008321099501
	PTi 70/220-240 S	4008321049629
	PTo 70/220-240 3DIM	4008321959355