

## OTi DALI 90/220...240/700 D LT2 L

OPTOTRONIC Intelligent – DALI (non-isolated) | Linear constant current LED driver – Dimmable



### Produktegenskaper

- Nätfrekvens: 0 Hz | 50 Hz | 60 Hz
- Matningsspänning: 220...240 V

### Användningsområde

- Installation i nödbelysningsystem enligt IEC 61347-2-13, bilaga J
- Lämplig för armaturer med skyddsklass I



## Tekniska data

### Elektriska data

<b>Nominell inspänning</b>	220...240 V
<b>Nätfrekvens</b>	0/50/60 Hz Hz
<b>Inspänning AC</b>	198...264 V <sup>1)</sup>
<b>Inspänning DC</b>	176...276 V
<b>Current set</b>	DALI / LEDset / Programmable
<b>Total övertonshalt</b>	< 10 %
<b>Effektfaktor <math>\lambda</math></b>	> 0,95 <sup>2)</sup>
<b>Efficiency in full-load</b>	93 % <sup>3)</sup>
<b>Förlusteffekt</b>	9,0 W <sup>4)</sup>
<b>Networked standby power</b>	≤0.30 W <sup>3)</sup>
<b>IP Inkopplingsström</b>	25 A
<b>Max antal HF-don på säkringsaut 10 A (B)</b>	15
<b>Max antal HF-don på säkringsaut 16 A (B)</b>	24
<b>Max antal HF-don på säkringsaut 25 A (B)</b>	-
<b>Spänningstopp (ström/jord)</b>	2 kV
<b>Spänningstopp (fas/neutral)</b>	1 kV
<b>Nominell utspänning</b>	54...240 V <sup>5)</sup>
<b>U-OUT (arbetsspänning)</b>	< 250 V
<b>Nominell utström</b>	250...700 mA
<b>Output current LEDset open</b>	125 mA
<b>Output current LEDset shorted</b>	250 mA
<b>Default output current</b>	125 mA <sup>6)</sup>
<b>Utgångsströmstolerans</b>	±3 % <sup>7)</sup>
<b>Utgångs rippelström (100 Hz)</b>	< 1 %
<b>Output PSTLM</b>	≤1
<b>Output SVM</b>	≤0.4
<b>Nominell uteffekt</b>	13,5...90 W
<b>Maximal uteffekt</b>	90 W
<b>Galvanisk isolation</b>	Non isolated

<sup>1)</sup> Tillåtet spänningsområde

<sup>2)</sup> Full last vid 230 V



<sup>3)</sup> at 230 V, 50 Hz

<sup>4)</sup> Maximum

<sup>5)</sup> Maximum 250 V



<sup>6)</sup> LEDset deactivated

<sup>7)</sup> When use DALI

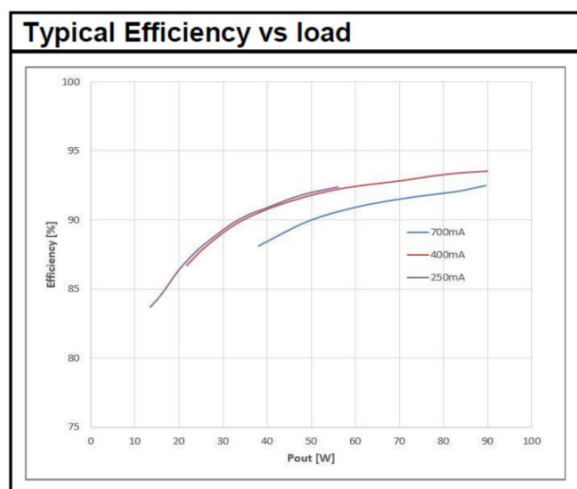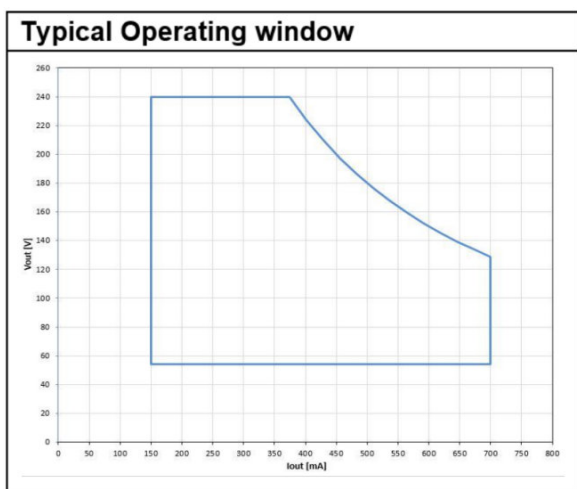


OTI DALI 90220-240700 D LT2 L Operating Window

OTI DALI 90220-240700 D LT2 L Typical Efficiency vs. Load (230 V 50 Hz)

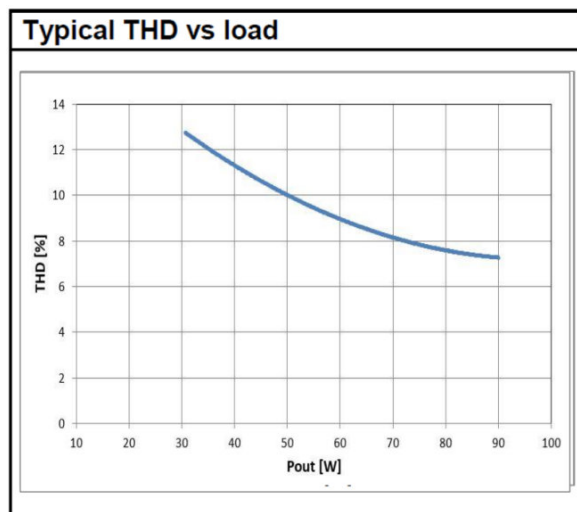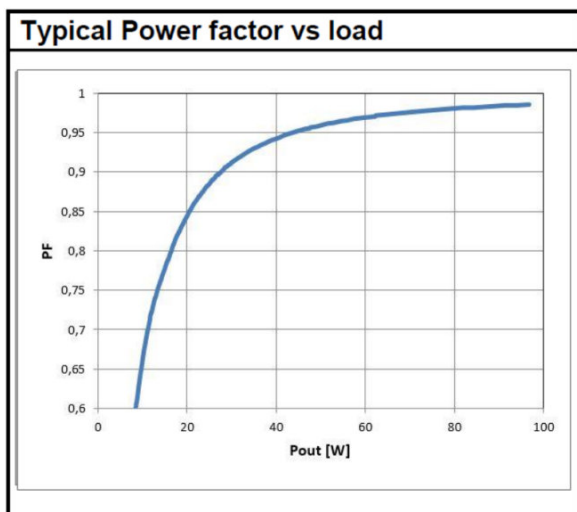


OTI DALI 90220-240700 D LT2 L Typical Power Factor vs. Load

OTI DALI 90220-240700 D LT2 L Typical THD Vs Load

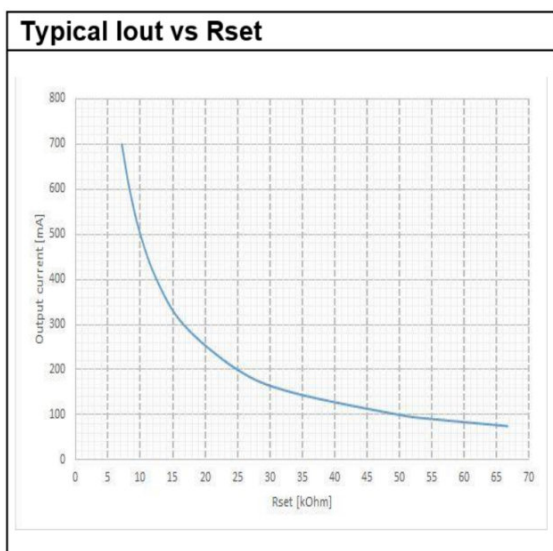

OTI DALI 90220-240700 D LT2 L Typical Iout vs Rset (LEDset2 mode)

Mått

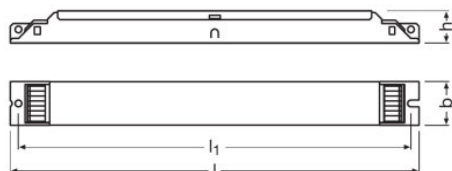

Hålavstånd längd	270,0 mm
produktvikt	205,00 g
Ledningsarea ingångsida	0,5...1,5 mm <sup>2</sup>
Ledningsarea utgångsida	0,5...1,5 mm <sup>2</sup>
Avisoleringslängd på primärsidan	8,5...9,5 mm
Avisoleringslängd på sekundärsidan	8,5...9,5 mm
Längd	280,0 mm
Bredd	30,0 mm
Höjd	21,0 mm

## Färger & Material

Inkapslingsmaterial	Metal
---------------------	-------

## Temperaturer och driftsförhållanden

Omgivningstemperaturområde	-25...+50 °C
Maximal temperatur vid tc testpunkt	75 °C
Maximal höljestemperatur vid fel	110 °C
Förvaringstemperatur	-25...85 °C
Tillåten rel. luftfuktighet under drift	5...85 % <sup>1)</sup>

<sup>1)</sup> Maximum 56 days/year at 85 %

## Livslängder

Hf-don livslängd	50000 / 100000 h <sup>1)</sup>
------------------	--------------------------------

<sup>1)</sup> At maximum  $T_c = 75^\circ\text{C} / 10\%$  failure rate / At  $T_c = 65^\circ\text{C} / 10\%$  failure rate

## Användningsområden

Programming interface	DALI, LEDset
Ljusreglerbar	Ja
Dimmer gränssnitt	DALI-2 / Touch DIM / Touch DIM Sensor
Ljusregleringsområde	1...100 % <sup>1)</sup>
Ljusregleringsteknik	Full analogue dimming
Överhettningsskydd	Automatisk avstängning, återställningsbar
Överlastskydd	Automatisk avstängning, återställningsbar
Kortslutningsskydd	Automatisk avstängning, återställningsbar
Kan drivas utan belastning	Ja
Intended for no-load operation	Nej
Max. kabellängd till lampa / LED-modul	2,0 m
Passande för armaturer med skyddsklass	I
Typ av anslutning, ineffektsida	Tryckplint
Typ av anslutning, uteffektsida	Tryckplint
Control interface	DALI
Number of channels	1
DALI-2 Energy Data	Ja
DALI-2 Diagnostic Data	Ja

<sup>1)</sup> For maximum nominal output current

## Programming

Programming device	DALI magic
Tuner4TRONIC Field App	Ja

## Programmable features

DALI-2 Luminaire Data	Ja
-----------------------	----

## Certifikat och Standarder

Godkännandemärkning	CE / EL / VDE-ENEC / VDE-EMC / EAC / CCC / BIS / RCM
Standarder	enL EN 61347-1/enL EN 61347-2-13/enL EN 55015/enL EN 61547/enL EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386
Skyddstyp	IP20








## Logistikdata

Statistiskt varunummer	850440829000
------------------------	--------------








## Environmental information

Date of Declaration	10-11-2021
Primary Article Identifier	4052899494244   4062172082242
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	a8235671-91b9-41c5-9020-4c9db3e0f66c   5219fb48-5ceb-49a7-8a54-c410ff614251

## Download

Dokument	
	User instruction OPTOTRONIC LED Power Supply
	Certifikat OTI DALI OT FIT D LT2 L CB DE1 58970 040320
	Certifikat OT ENEC 40038085 130720
	Konformitetsdeklaration EATON(CEAG)-Conformity declaration AN00951 OTI DALI 90220-240700 D LT2 L
	Konformitetsdeklaration INOTEC-Conformity declaration AN00951 OTI DALI 90220-240700 D LT2 L
	Konformitetsdeklaration 727247_EC OTi
	Konformitetsdeklaration OTI DALI D LT2 L UK DoC 4281086 180221

## Produktdatablad

	Konformitetsdeklaration OTI DALI D LT2 L CE 3667898 210921
	Konformitetsdeklaration EATON(CEAG)-Conformity declaration AM00140_OTiDALI90_220_240_700_D_LT2_L
	Konformitetsdeklaration INOTEC- Conformity declaration AM00140_OTiDALI90_220_240_700_D_LT2_L
	CAD-data OTI DALI D LT2 L IGS 270220
	CAD-data OTI DALI D LT2 L STEP 270220
	CAD-data 2-dim OTI DALI D LT2 L CAD2PDF 270220
	CAD-data 3-dim OTI DALI D LT2 L CAD3PDF 270220

### Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

### Logistiska data

Produktnummer	Produktbeskrivning	Förpackningsenhet (Styck/Enhet)	Dimensioner (längd x bredd x höjd)	Volym	Bruttovikt
4052899494244	OTi DALI 90/220...240/700 D LT2 L	Transportförpackning 20	305 mm x 161 mm x 104 mm	5.11 dm <sup>3</sup>	4277.00 g

Produktkoden gäller minsta tillåtna beställningskvantitet. En transportförpackning kan innehålla en eller flera produkter. Vid orderläggning, vänligen ange en eller flera transportförpackningar.

### Datasäkerhetsskydd

## Produktdatablad

This OSRAM driver can be configured using the Tuner4TRONIC software. This requires registering on [www.myosram.com](http://www.myosram.com) and downloading the Tuner4TRONIC software from the Internet. The Tuner4TRONIC software enables users to access and view the operational data of a luminaire or driver via the corresponding programming interfaces. A password key (Config Lock) must be set up in the driver via the Tuner4TRONIC software in order to control which users can access and view operational data. Follow the instructions for password setup. To grant an external person or company rights to access or view operational data, you can assign password keys. In this case, however, you are responsible for ensuring that the third party concerned takes notice of the information described here. However, OSRAM can read out operating data from devices for maintenance and service purposes even when a password key has been assigned. In individual cases, OSRAM will also use its access rights in order to optimize or improve driver hardware and driver functions. In accordance with data privacy principles, any user of operating data (luminaire manufacturers, third parties with access rights) must ensure that personal data (e.g. name, address, location IDs) are only merged with the prior written consent of the person (end user) concerned. The respective user of the operating data is responsible for providing evidence of consent.

---

### Friskrivningsklausul

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.