

Produktdatablad

HQI-T 250 W/D PRO

POWERSTAR HQI-T | Metallhalogenlampor med kvartsteknologi för slutna armaturer



Tekniska data


Elektriska data

ZLDV_PFC capacitor at 50 Hz [AGGR]	32 μ F
ZLDV_Ignition voltage [AGGR]	4.0/5.0 kVp
ZLDV_Nominal current [AGGR]	3 A

Fotometrisk data

ZLDV_Rated LLMF at 2,000 h [AGGR]	0.95
ZLDV_Rated LLMF at 4,000 h [AGGR]	0.92
ZLDV_Rated LLMF at 6,000 h [AGGR]	0.9
ZLDV_Rated LLMF at 8,000 h [AGGR]	0.87
ZLDV_Rated LLMF at 12,000 h [AGGR]	0.85
ZLDV_UV protection [AGGR]	Yes
ZLDV_Luminous flux [AGGR]	18000 lm

Mått



ZLDV_Light center length (LCL) [AGGR]	150 mm
ZLDV_Product weight [AGGR]	150.00 g
ZLDV_Overall length [AGGR]	226.00 mm

Temperaturer och driftsförhållanden

ZLDV_Maximum permitted base edge temperature [AGGR]	250 °C
---	--------

Livslängder

ZLDV_Lifespan B50 [AGGR]	16000 h
--------------------------	---------

Tillägg produktdata

Produktdatablad

ZLDV_Design / version [AGGR]	Clear
ZLDV_Mercury content [AGGR]	21.0 mg
Bortskaffande enl. WEEE-direktivet	Ja

Användningsområden

ZLDV_Burning position [AGGR]	Any
ZLDV_Enclosed luminaire required [AGGR]	Yes

Certifikat och Standarder

ZLDV_Energy efficiency class [AGGR]	G
ZLDV_Energy consumption [AGGR]	260.00 kWh/1000h


Landspecifika kategorier

ZLDV_ILCOS [AGGR]	MT/UB-250/952-H/E/SL-E40-46/226
-------------------	---------------------------------



Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	13-05-2022
Primary Article Identifier	4008321677846
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained

Ljusfördelning

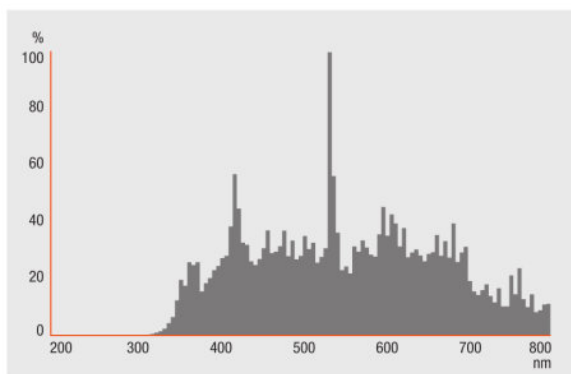


HQI_T_D_PRO

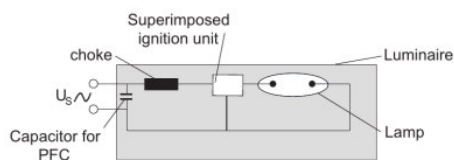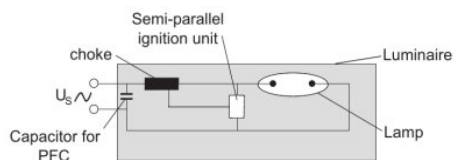

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH SEMI-PARALLEL IGNITION UNIT

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH A SUPERIMPOSED IGNITION UNIT

Produktdatablad

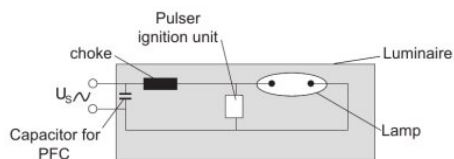

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH PULSE IGNITION UNIT

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistiska data

Produktnummer	Produktbeskrivning	Förpackningsenhet (Styck/Enhet)	Dimensioner (längd x bredd x höjd)	Volym	Bruttovikt
4008321677846	HQI-T 250 W/D PRO	Transportförpackning g 12 Pieces Pappkartong	277 mm x 281 mm x 217 mm	16.89 dm ³	2304.00 g

Produktkoden gäller minsta tillåtna beställningskvantitet. En transportförpackning kan innehålla en eller flera produkter. Vid orderläggning, vänligen ange en eller flera transportförpackningar.

Friskrivningsklausul

Kan ändras utan föregående notifiering. Felaktigheter och försummelse undantagna. Se alltid till att använda den senaste utgåvan.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

HQI-T 250 W/D PRO

POWERSTAR HQI-T | Metallhalogenlampor med kvartsteknologi för slutna armaturer

Produktnamn	Produktnamn elektroniskt förkopplingsdon	EAN
HQI-T 250 W/D PRO	PTo 250/220-240 3DIM	4008321863669