


PrevaLED Flat AC DA

Spot-, down- och väggfasta ljusmoduler

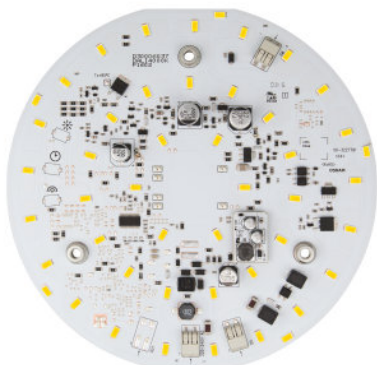

Produktegenskaper

- Ljusregleringsområde (DALI): 1 ... 100 %
- Mått för DALI-version identisk med on/off-version
- Designad för vägg- och takarmaturer med diffus ljusfördelning
- Prisvärd LED-ersättning för CFL vägg- och takarmaturer
- Drivdon är integrerat på LED kretskortet
- Available diameter: 170 mm, 240 mm, 335 mm, 415 mm
- Finns med färgtemperatur: 3000 K eller 4000 K
- Available with luminous flux: 1,500 lm, 2,500 lm, 4,000 lm, 5,000 lm
- Livslängd (L70/B50): 50,000 h (temperatur vid $T_c = 80^\circ\text{C}$)

Produktfördelar

- Hög tillförlitlighet
- Lätt att använda
- Optimerad design för enkel termisk styrning
- Möjliggör tunna och effektiva armaturdesigner
- Hög kvalitet på belysningen tack vare låg modulation
- 5 års garanti

Användningsområde

- Korridorer
- Trapphus
- Plattform
- Entréhallar
- Nödbelysning för system med ett batteri
- Armaturer för nödbelysning med centralt batteri enligt IEC 60598-2-22

Datablad produktfamilj

Appliktionsråd

För mer detaljerad applikationsinformation och grafik, vänligen se produktdatablad

Databladstext

- Installation by qualified electrician only.
- Please see the relevant application guides and instructions sheets for more detailed safety and mounting information. Additional information is available on request.
- Complies with IEC/EN 62031
- Complies with IEC/EN 61547
- Complies with IEC/EN 61000-3-2
- Complies with EN 55015, CISPR 15
- Complies with IEC/EN 62717
- Electrical contact is achieved with the contact cables or the terminals of the module. Please refer to the technical data for maximum number of LED modules that can be operated on one control gear.
- Conducting paths on the circuit board must not be damaged or destroyed during installation.
- The LED module itself and all its components must not be stressed mechanically.
- For optimal cooling a thermal interface material should be applied between LED module and heat sink.
- The module must not be attached to wood or other flammable materials.
- Protect against splashes!
- The module, as manufactured, has no inherent protection against corrosion. It is the user's responsibility to provide suitable protection against corrosive agents, such as moisture, condensation and other harmful elements.
- For efficiency measurement, the product shall be set to a DALI dimming level of 100% by using Tuner4TRONIC. Refer to www.tuner4tronic.com.
- The product implemented control components are not designed for removal.

Försäljning och teknisk support

Försäljning och teknisk support www.osram.se

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Referenser / Länkar

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit [https://](https://www.inventronics-light.com/multilevel-guarantees)

- ▶ www.inventronics-light.com/multilevel-guarantees

Friskrivningsklausul

Kan ändras utan föregående notifiering. Felaktigheter och försummelse undantagna. Se alltid till att använda den senaste utgåvan.