

SPD 10 275 -D

SPD /275/ D | Surge protection device



Produktegenskaper

- High surge protection for all lighting applications
- Failure indication LED
- Mains voltage up to 275 V
- Voltage protection level for connected LED driver <1.5 kV
- Push-in terminal

Produktfördelar

- Several protection level options for different applications
- Securing uptime of your outdoor lighting installation from overvoltage pulses
- Fully compliant with IEC 61643-11

Användningsområde

- Gatu- och stadsbelysning
- Industry lighting
- Utomhusapplikationer


Tekniska data

Elektriska data

Suitable for power grids	TN
Surge protection voltage(L-N)	10 kV
Nominal discharge current (L-N)	5 kA
Max. voltage protection level (Up, L-N)	1,5 kV
Power losses (% of total system power)	0,1 %
Surge withstand capability	10kA / 5kA / 3kA ¹⁾
End of life indication (by LED light)	YES
Over current protection	15 A
Open-circuit voltage	10 kV

¹⁾ 1strike / 30strike / 50strike

Mått

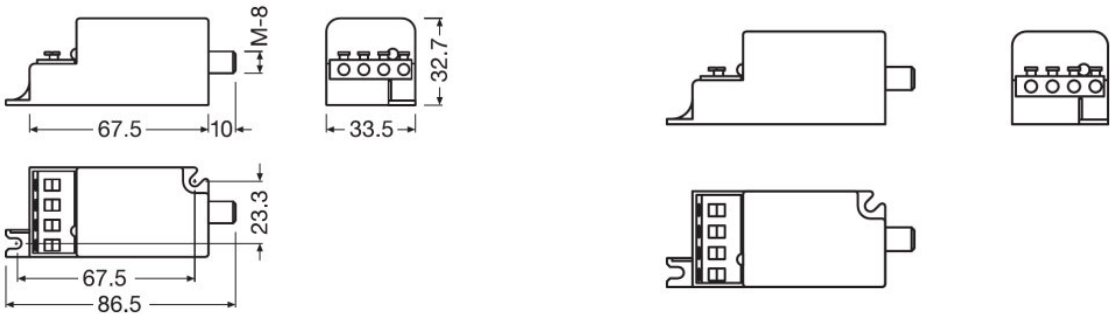

produktvikt	8500 g
Längd	865 mm
Bredd	335 mm
Höjd	327 mm

Logistikdata

Statistiskt varunummer	85044083900
------------------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (RECh)	
Date of Declaration	23-12-2021
Primary Article Identifier	4062172110037
Candidate List Substance 1	Lead

Produktdatablad

CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	cfbefa9e-8021-4aab-a593-edec09a07a6

Download

Dokument	
	User instruction Surge Protection Device
	Konformitetsdeklaration SPD 275 P5 D UK DoC 4291496 270923
	Konformitetsdeklaration SPD 10 15 CE 3597923 070923

Logistiska data

Produktnummer	Produktbeskrivning	Förpackningsenhet (Styck/Enhet)	Dimensioner (längd x bredd x höjd)	Volym	Bruttovikt
4062172110037	SPD 10 275 -D	Transportförpackning 60	395 mm x 245 mm x 120 mm	11.61 dm ³	5517.00 g

Produktkoden gäller minsta tillåtna beställningskvantitet. En transportförpackning kan innehålla en eller flera produkter. Vid orderläggning, vänligen ange en eller flera transportförpackningar.

Friskrivningsklausul

OSRAM products must never be directly exposed to external influences. Always provide adequate protection for relevant applications (covers, housings etc.) otherwise any warranty claim will be invalid.