

## PrevaLED Linear G6 CRI90

Linjär LED modul



### Produktegenskaper

- Tillgänglig med ljusflöde: 2 200 lm eller 4 000 lm på 560 mm

### Produktfördelar

- High voltage (HV) optimized for non-isolated, low voltage (LV) optimized for SELV operation

### Användningsområde

- Office
- Industri



Tekniska data

| Produktbeskrivning              | Elektriska data       |           |                   |                                      |                      |
|---------------------------------|-----------------------|-----------|-------------------|--------------------------------------|----------------------|
|                                 | Nominell märkspänning | Märkström | Strömtyp          | Energy consumption in on-mode [AGGR] | On-mode power [AGGR] |
| PL-LIN-Z6 245-930 62X20-HV      | 530 V                 | 03 A      | Direkt ström (DC) | 1.7 kWh/1000h                        | 1.70 W               |
| PL-LIN-Z6 245-940 62X20-HV      | 530 V                 | 03 A      | Direkt ström (DC) | 1.7 kWh/1000h                        | 1.70 W               |
| PL-LIN-Z6 275-930 70X20-LV      | 238 V                 | 0075 A    | Direkt ström (DC) | 1.9 kWh/1000h                        | 1.90 W               |
| PL-LIN-Z6 275-940 70X20-LV      | 238 V                 | 0075 A    | Direkt ström (DC) | 1.8 kWh/1000h                        | 1.80 W               |
| PL-LIN-Z6 1100-930 280X20-LV/HV | 23,8 V                | 0,3 A     | Direkt ström (DC) | 7.4 kWh/1000h                        | 7.40 W               |
| PL-LIN-Z6 1100-940 280X20-LV/HV | 23,8 V                | 0,3 A     | Direkt ström (DC) | 7.4 kWh/1000h                        | 7.40 W               |
| PL-LIN-Z6 1100-950 280X20-LV/HV | 238 V                 | 03 A      | Direkt ström (DC) | 7.4 kWh/1000h                        | 7.40 W               |
| PL-LIN-Z6 2000-930 280X20-LV/HV | 43,2 V                | 0,3 A     | Direkt ström (DC) | 13.4 kWh/1000h                       | 13.40 W              |
| PL-LIN-Z6 2000-940 280X20-LV/HV | 43,2 V                | 0,3 A     | Direkt ström (DC) | 13.4 kWh/1000h                       | 13.40 W              |
| PL-LIN-Z6 2000-950 280X20-LV/HV | 43,2 V                | 0,3 A     | Direkt ström (DC) | 13.4 kWh/1000h                       | 13.40 W              |
| PL-LIN-Z6 2200-930 560X20-HV    | 477 V                 | 03 A      | Direkt ström (DC) | 14.9 kWh/1000h                       | 14.90 W              |
| PL-LIN-Z6 2200-930 560X20-LV    | 238 V                 | 06 A      | Direkt ström (DC) | 15.0 kWh/1000h                       | 15.00 W              |
| PL-LIN-Z6 2200-940 560X20-HV    | 477 V                 | 03 A      | Direkt ström (DC) | 14.8 kWh/1000h                       | 14.80 W              |
| PL-LIN-Z6 2200-940 560X20-LV    | 238 V                 | 06 A      | Direkt ström (DC) | 14.5 kWh/1000h                       | 14.50 W              |
| PL-LIN-Z6 2200-950 560X20-HV    | 477 V                 | 03 A      | Direkt ström (DC) | 14.8 kWh/1000h                       | 14.80 W              |
| PL-LIN-Z6 2200-950 560X20-LV    | 238 V                 | 06 A      | Direkt ström (DC) | 14.9 kWh/1000h                       | 14.90 W              |
| PL-LIN-Z6 4000-930 560X20-HV    | 865 V                 | 03 A      | Direkt ström (DC) | 26.8 kWh/1000h                       | 26.80 W              |
| PL-LIN-Z6 4000-930 560X20-LV    | 432 V                 | 06 A      | Direkt ström (DC) | 26.9 kWh/1000h                       | 26.90 W              |
| PL-LIN-Z6 4000-940 560X20-HV    | 865 V                 | 03 A      | Direkt ström (DC) | 26.6 kWh/1000h                       | 26.60 W              |
| PL-LIN-Z6 4000-940 560X20-LV    | 432 V                 | 06 A      | Direkt ström (DC) | 26.6 kWh/1000h                       | 26.60 W              |
| PL-LIN-Z6 4000-950 560X20-HV    | 865 V                 | 03 A      | Direkt ström (DC) | 26.6 kWh/1000h                       | 26.60 W              |
| PL-LIN-Z6 4000-950 560X20-LV    | 43,2 V                | 0,6 A     | Direkt ström (DC) | 26.5 kWh/1000h                       | 26.50 W              |

Datablad produktfamilj

| Produktbeskrivning              | Fotometrisk data |                                    |                                             |                                         |
|---------------------------------|------------------|------------------------------------|---------------------------------------------|-----------------------------------------|
|                                 | Ljusutbyte       | Useful luminous flux (Φuse) [AGGR] | Colour consistency (McAdam ellipses) [AGGR] | Correlated color temperature CCT [AGGR] |
| PL-LIN-Z6 245-930 62X20-HV      | 145 lm/W         | 228 lm                             | 3                                           | 3000 K                                  |
| PL-LIN-Z6 245-940 62X20-HV      | 164 lm/W         | 249 lm                             | 3                                           | 4000 K                                  |
| PL-LIN-Z6 275-930 70X20-LV      | 145 lm/W         | 258 lm                             | 3                                           | 3000 K                                  |
| PL-LIN-Z6 275-940 70X20-LV      | 164 lm/W         | 276 lm                             | 3                                           | 4000 K                                  |
| PL-LIN-Z6 1100-930 280X20-LV/HV | 145 lm/W         | 1039 lm                            | 3                                           | 3000 K                                  |
| PL-LIN-Z6 1100-940 280X20-LV/HV | 164 lm/W         | 1123 lm                            | 3                                           | 4000 K                                  |
| PL-LIN-Z6 1100-950 280X20-LV/HV | 164 lm/W         | 1153 lm                            | 3                                           | 5000 K                                  |
| PL-LIN-Z6 2000-930 280X20-LV/HV | 140 lm/W         | 1821 lm                            | 3                                           | 3000 K                                  |
| PL-LIN-Z6 2000-940 280X20-LV/HV | 158 lm/W         | 1969 lm                            | 3                                           | 4000 K                                  |
| PL-LIN-Z6 2000-950 280X20-LV/HV | 158 lm/W         | 2033 lm                            | 3                                           | 5000 K                                  |
| PL-LIN-Z6 2200-930 560X20-HV    | 145 lm/W         | 2079 lm                            | 3                                           | 3000 K                                  |
| PL-LIN-Z6 2200-930 560X20-LV    | 145 lm/W         | 2079 lm                            | 3                                           | 3000 K                                  |
| PL-LIN-Z6 2200-940 560X20-HV    | 164 lm/W         | 2222 lm                            | 3                                           | 4000 K                                  |
| PL-LIN-Z6 2200-940 560X20-LV    | 164 lm/W         | 2191 lm                            | 3                                           | 4000 K                                  |
| PL-LIN-Z6 2200-950 560X20-HV    | 164 lm/W         | 2304 lm                            | 3                                           | 5000 K                                  |
| PL-LIN-Z6 2200-950 560X20-LV    | 164 lm/W         | 2303 lm                            | 3                                           | 5000 K                                  |
| PL-LIN-Z6 4000-930 560X20-HV    | 140 lm/W         | 3660 lm                            | 3                                           | 3000 K                                  |
| PL-LIN-Z6 4000-930 560X20-LV    | 140 lm/W         | 3660 lm                            | 3                                           | 3000 K                                  |
| PL-LIN-Z6 4000-940 560X20-HV    | 158 lm/W         | 3902 lm                            | 3                                           | 4000 K                                  |
| PL-LIN-Z6 4000-940 560X20-LV    | 158 lm/W         | 3807 lm                            | 3                                           | 4000 K                                  |
| PL-LIN-Z6 4000-950 560X20-HV    | 158 lm/W         | 4043 lm                            | 3                                           | 5000 K                                  |
| PL-LIN-Z6 4000-950 560X20-LV    | 158 lm/W         | 4055 lm                            | 3                                           | 5000 K                                  |

| Produktbeskrivning              | Färgåtergivningsindex Ra | LED-modulinformation | Mått        |                    |                     |
|---------------------------------|--------------------------|----------------------|-------------|--------------------|---------------------|
|                                 |                          | Antal LED per modul  | produktvikt | Width EPREL [AGGR] | Length EPREL [AGGR] |
| PL-LIN-Z6 245-930 62X20-HV      | 90                       | 8                    | 500 g       | 20.0 mm            | 62.0 mm             |
| PL-LIN-Z6 245-940 62X20-HV      | 90                       | 8                    | 500 g       | 20.0 mm            | 62.0 mm             |
| PL-LIN-Z6 275-930 70X20-LV      | 90                       | 9                    | 500 g       | 20.0 mm            | 70.0 mm             |
| PL-LIN-Z6 275-940 70X20-LV      | 90                       | 9                    | 500 g       | 20.0 mm            | 70.0 mm             |
| PL-LIN-Z6 1100-930 280X20-LV/HV | 90                       | 36                   | 20,00 g     | 20.0 mm            | 280.0 mm            |
| PL-LIN-Z6 1100-940 280X20-LV/HV | 90                       | 36                   | 20,00 g     | 20.0 mm            | 280.0 mm            |
| PL-LIN-Z6 1100-950 280X20-LV/HV | 90                       | 36                   | 2000 g      | 20.0 mm            | 280.0 mm            |
| PL-LIN-Z6 2000-930 280X20-LV/HV | 90                       | 72                   | 20,00 g     | 20.0 mm            | 280.0 mm            |
| PL-LIN-Z6 2000-940 280X20-LV/HV | 90                       | 48                   | 20,00 g     | 20.0 mm            | 280.0 mm            |
| PL-LIN-Z6 2000-950 280X20-LV/HV | 90                       | 48                   | 20,00 g     | 20.0 mm            | 280.0 mm            |
| PL-LIN-Z6 2200-930 560X20-HV    | 90                       | 72                   | 4000 g      | 20.0 mm            | 560.0 mm            |
| PL-LIN-Z6 2200-930 560X20-LV    | 90                       | 72                   | 4000 g      | 20.0 mm            | 560.0 mm            |
| PL-LIN-Z6 2200-940 560X20-HV    | 90                       | 72                   | 4000 g      | 20.0 mm            | 560.0 mm            |
| PL-LIN-Z6 2200-940 560X20-LV    | 90                       | 48                   | 4000 g      | 20.0 mm            | 560.0 mm            |
| PL-LIN-Z6 2200-950 560X20-HV    | 90                       | 72                   | 4000 g      | 20.0 mm            | 560.0 mm            |

| Produktbeskrivning           | Färgåtergivning<br>index Ra | LED-modulinformation | Mått        |                    |                     |
|------------------------------|-----------------------------|----------------------|-------------|--------------------|---------------------|
|                              |                             | Antal LED per modul  | produktvikt | Width EPREL [AGGR] | Length EPREL [AGGR] |
| PL-LIN-Z6 2200-950 560X20-LV | 90                          | 48                   | 4000 g      | 20.0 mm            | 560.0 mm            |
| PL-LIN-Z6 4000-930 560X20-HV | 90                          | 96                   | 4000 g      | 20.0 mm            | 560.0 mm            |
| PL-LIN-Z6 4000-930 560X20-LV | 90                          | 96                   | 4000 g      | 20.0 mm            | 560.0 mm            |
| PL-LIN-Z6 4000-940 560X20-HV | 90                          | 96                   | 4000 g      | 20.0 mm            | 560.0 mm            |
| PL-LIN-Z6 4000-940 560X20-LV | 90                          | 96                   | 4000 g      | 20.0 mm            | 560.0 mm            |
| PL-LIN-Z6 4000-950 560X20-HV | 90                          | 96                   | 4000 g      | 20.0 mm            | 560.0 mm            |
| PL-LIN-Z6 4000-950 560X20-LV | 90                          | 96                   | 40,00 g     | 20.0 mm            | 560.0 mm            |

| Produktbeskrivning              | Height EPREL [AGGR] | Temperaturer och driftsförhållanden      |                                      |                                        |                          |
|---------------------------------|---------------------|------------------------------------------|--------------------------------------|----------------------------------------|--------------------------|
|                                 |                     | Temperaturbete<br>ende enl. IEC<br>62717 | Temperatu<br>mråde vid Tc<br>punkten | Maximal temperatur<br>vid tc testpunkt | Förvaringstem<br>peratur |
| PL-LIN-Z6 245-930 62X20-HV      | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 245-940 62X20-HV      | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 275-930 70X20-LV      | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 275-940 70X20-LV      | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 1100-930 280X20-LV/HV | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 1100-940 280X20-LV/HV | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 1100-950 280X20-LV/HV | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 2000-930 280X20-LV/HV | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 2000-940 280X20-LV/HV | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 2000-950 280X20-LV/HV | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 2200-930 560X20-HV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 2200-930 560X20-LV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 2200-940 560X20-HV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 2200-940 560X20-LV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 2200-950 560X20-HV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 2200-950 560X20-LV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 4000-930 560X20-HV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 4000-930 560X20-LV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 4000-940 560X20-HV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 4000-940 560X20-LV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 4000-950 560X20-HV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |
| PL-LIN-Z6 4000-950 560X20-LV    | 5.0 mm              | 50 °C                                    | -20...75 °C                          | 75 °C                                  | -30...85 °C              |

| Produktbeskrivning         | Omgivningstempera<br>turområde | Livslängder               |                                        | Tillägg produktdata                |
|----------------------------|--------------------------------|---------------------------|----------------------------------------|------------------------------------|
|                            |                                | L70B50 lifetime<br>[AGGR] | Lumen maintenance<br>factor LMF [AGGR] | Lighting technology<br>used [AGGR] |
| PL-LIN-Z6 245-930 62X20-HV | -20...+75 °C                   | 100000 h                  | 96                                     | LED                                |
| PL-LIN-Z6 245-940 62X20-HV | -20...+75 °C                   | 100000 h                  | 96                                     | LED                                |
| PL-LIN-Z6 275-930 70X20-LV | -20...+75 °C                   | 100000 h                  | 96                                     | LED                                |
| PL-LIN-Z6 275-940 70X20-LV | -20...+75 °C                   | 100000 h                  | 96                                     | LED                                |


Datablad produktfamilj

| Produktbeskrivning              | Omgivningstemperaturområde | Livslängder            |                                     | Tillägg produktdata |
|---------------------------------|----------------------------|------------------------|-------------------------------------|---------------------|
|                                 |                            | L70B50 lifetime [AGGR] | Lumen maintenance factor LMF [AGGR] |                     |
| PL-LIN-Z6 1100-930 280X20-LV/HV | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 1100-940 280X20-LV/HV | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 1100-950 280X20-LV/HV | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 2000-930 280X20-LV/HV | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 2000-940 280X20-LV/HV | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 2000-950 280X20-LV/HV | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 2200-930 560X20-HV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 2200-930 560X20-LV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 2200-940 560X20-HV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 2200-940 560X20-LV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 2200-950 560X20-HV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 2200-950 560X20-LV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 4000-930 560X20-HV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 4000-930 560X20-LV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 4000-940 560X20-HV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 4000-940 560X20-LV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 4000-950 560X20-HV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |
| PL-LIN-Z6 4000-950 560X20-LV    | -20...+75 °C               | 100000 h               | 96                                  | LED                 |


| Produktbeskrivning              | Produkten ersätts av EAN | Certifikat och Standarder |                                | Logistikdata |
|---------------------------------|--------------------------|---------------------------|--------------------------------|--------------|
|                                 |                          | Standarder                | Energy efficiency class [AGGR] |              |
| PL-LIN-Z6 245-930 62X20-HV      |                          | CE/ENEC/VDE               | E                              | 85414100000  |
| PL-LIN-Z6 245-940 62X20-HV      |                          | CE/ENEC/VDE               | D                              | 85414100000  |
| PL-LIN-Z6 275-930 70X20-LV      |                          | CE/ENEC/VDE               | E                              | 85414100000  |
| PL-LIN-Z6 275-940 70X20-LV      |                          | CE/ENEC/VDE               | D                              | 85414100000  |
| PL-LIN-Z6 1100-930 280X20-LV/HV | 4052899984899            | CE/ENEC/VDE               | E                              | 85414100000  |
| PL-LIN-Z6 1100-940 280X20-LV/HV | 4052899984905            | CE/ENEC/VDE               | D                              | 85414100000  |
| PL-LIN-Z6 1100-950 280X20-LV/HV | 4052899984912            | CE/ENEC/VDE               | D                              | 85414100000  |
| PL-LIN-Z6 2000-930 280X20-LV/HV | 4052899985087            | CE/ENEC/VDE               | E                              | 85414100000  |
| PL-LIN-Z6 2000-940 280X20-LV/HV | 4052899985094            | CE/ENEC/VDE               | D                              | 85414100000  |
| PL-LIN-Z6 2000-950 280X20-LV/HV | 4052899985100            | CE/ENEC/VDE               | D                              | 85414100000  |
| PL-LIN-Z6 2200-930 560X20-HV    |                          | CE/ENEC/VDE               | E                              | 85395100000  |
| PL-LIN-Z6 2200-930 560X20-LV    | 4052899985278            | CE/ENEC/VDE               | E                              | 85414100000  |
| PL-LIN-Z6 2200-940 560X20-HV    |                          | CE/ENEC/VDE               | D                              | 85395100000  |
| PL-LIN-Z6 2200-940 560X20-LV    | 4052899985285            | CE/ENEC/VDE               | D                              | 85414100000  |
| PL-LIN-Z6 2200-950 560X20-HV    |                          | CE/ENEC/VDE               | D                              | 85395100000  |
| PL-LIN-Z6 2200-950 560X20-LV    | 4052899985292            | CE/ENEC/VDE               | D                              | 85414100000  |
| PL-LIN-Z6 4000-930 560X20-HV    |                          | CE/ENEC/VDE               | E                              | 85395100000  |
| PL-LIN-Z6 4000-930 560X20-LV    | 4052899985469            | CE/ENEC/VDE               | E                              | 85414100000  |
| PL-LIN-Z6 4000-940 560X20-HV    |                          | CE/ENEC/VDE               | D                              | 85395100000  |
| PL-LIN-Z6 4000-940 560X20-LV    | 4052899985476            | CE/ENEC/VDE               | E                              | 85414100000  |
| PL-LIN-Z6 4000-950 560X20-HV    |                          | CE/ENEC/VDE               | D                              | 85395100000  |
| PL-LIN-Z6 4000-950 560X20-LV    | 4052899985483            | CE/ENEC/VDE               | D                              | 85414100000  |

Datablad produktfamilj


| Produktbeskrivning              | Environmental information<br>Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |                            |                                    |                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------|----------------------------|------------------------------------|------------------------------------|
|                                 | Date of Declaration                                                                                | Primary Article Identifier | Candidate List Substance 1         | Declaration No. in SCIP database   |
| PL-LIN-Z6 245-930 62X20-HV      | 18-04-2022                                                                                         | 4052899607965              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 245-940 62X20-HV      | 18-04-2022                                                                                         | 4052899607972              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 275-930 70X20-LV      | 18-04-2022                                                                                         | 4052899607989              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 275-940 70X20-LV      | 18-04-2022                                                                                         | 4052899607996              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 1100-930 280X20-LV/HV | 18-04-2022                                                                                         | 4052899606760              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 1100-940 280X20-LV/HV | 18-04-2022                                                                                         | 4052899606777              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 1100-950 280X20-LV/HV | 18-04-2022                                                                                         | 4052899606784              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 2000-930 280X20-LV/HV | 18-04-2022                                                                                         | 4052899606791              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 2000-940 280X20-LV/HV | 10-08-2023                                                                                         | 4052899606807              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 2000-950 280X20-LV/HV | 23-08-2023                                                                                         | 4052899606814              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 2200-930 560X20-HV    | 23-08-2023                                                                                         | 4052899606883              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 2200-930 560X20-LV    | 23-08-2023                                                                                         | 4052899606821              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 2200-940 560X20-HV    | 10-08-2023                                                                                         | 4052899606890              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 2200-940 560X20-LV    | 18-04-2022                                                                                         | 4052899606838              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 2200-950 560X20-HV    | 23-08-2023                                                                                         | 4052899606906              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 2200-950 560X20-LV    | 18-04-2022                                                                                         | 4052899606845              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 4000-930 560X20-HV    | 18-04-2022                                                                                         | 4052899606913              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 4000-930 560X20-LV    | 18-04-2022                                                                                         | 4052899606852              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 4000-940 560X20-HV    | 18-04-2022                                                                                         | 4052899606920              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 4000-940 560X20-LV    | 18-04-2022                                                                                         | 4052899606869              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 4000-950 560X20-HV    | 18-04-2022                                                                                         | 4052899606937              | No declarable substances contained | No declarable substances contained |
| PL-LIN-Z6 4000-950 560X20-LV    | 18-04-2022                                                                                         | 4052899606876              | No declarable substances contained | No declarable substances contained |

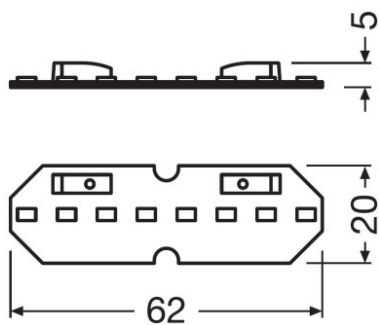


PL-LIN-Z6 245-830 62x20-HV

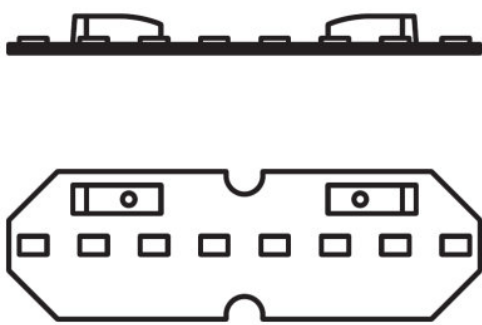


PL-LIN-Z6 245-830 62x20-HV

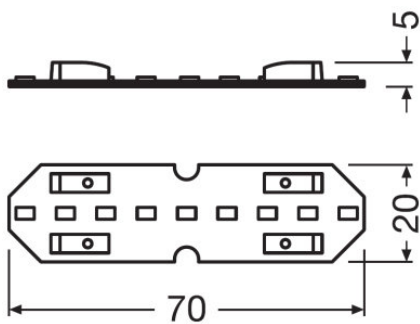


PL-LIN-Z6 275-827 70x20-LV

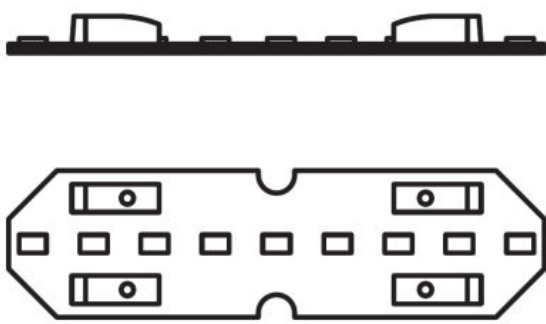


PL-LIN-Z6 275-827 70x20-LV

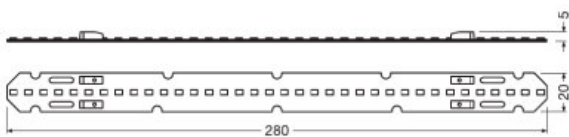


PL-LIN-Z6 1100-827 280X20-LVHV



PL-LIN-Z6 1100-827 280X20-LVHV

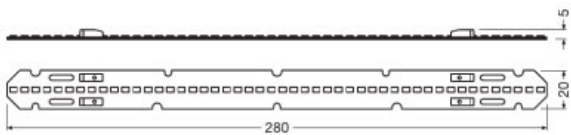


PL-LIN-Z6 2000-827 280X20-LVHV




PL-LIN-Z6 2200-827 560X20-HV



PL-LIN-Z6 2200-827 560X20-HV



PL-LIN-Z6 2200-827 560X20-LV




PL-LIN-Z6 2200-827 560X20-LV



PL-LIN-Z6 4000-827 560X20-HV



Datablad produktfamilj



PL-LIN-Z6 4000-865 560x20-LV

Appliaktionsråd

För mer detaljerad applikationsinformation och grafik, vänligen se produktdatablad

Databladstext

– When parallel wiring, tolerance-related differences in output are possible and may cause deviations in brightness.

Försäljning och teknisk support

Försäljning och teknisk support [www.osram.se](http://www.osram.se)

Download

| Dokument                                                                            |                                                                |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | Certifikat<br>PL ENEC 40031612 250723                          |
|  | Konformitetsdeklaration<br>PL LIN Z6 CE 3812352 090823         |
|  | CAD-data 3-dim<br>PL LIN Z6 245 62x20 HV CADPDF 240220         |
|  | CAD-data 3-dim<br>PL LIN Z6 275 70x20 LV CADPDF 220819         |
|  | CAD-data 3-dim<br>PL LIN Z5 Z6 1100 280x20 LV HV CADPDF 240220 |
|  | CAD-data 3-dim<br>PL LIN Z5 Z6 2000 280x20 LV HV CADPDF 240220 |
|  | CAD-data 3-dim<br>PL LIN Z5 Z6 2200 560x20 HV CADPDF 240220    |

Datablad produktfamilj

|                                                                                   |                                                                          |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|
|  | Konformitetsdeklaration<br>EU Declaration of conformity PL-LIN-Z4 family |
|  | Konformitetsdeklaration<br>Declaraton of conformity PL-LIN-Z4            |
|  | CAD-data 3-dim<br>PL LIN Z5 Z6 2200 560x20 LV CADPDF 240220              |
|  | User instruction<br>PrevaLED Linear G5 G6                                |
|  | CAD-data 3-dim<br>PL LIN Z5 Z6 4000 560x20 HV CADPDF 240220              |
|  | CAD-data 3-dim<br>PL LIN Z5 Z6 4000 560x20 LV CADPDF 240220              |

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistiska data

| Produktnummer | Produktbeskrivning                 | Förpackningsenhet<br>(Styck/Enhet) | Dimensioner (längd x bredd x<br>höjd) | Volym                 | Bruttovikt |
|---------------|------------------------------------|------------------------------------|---------------------------------------|-----------------------|------------|
| 4052899607965 | PL-LIN-Z6 245-930<br>62X20-HV      | Transportförpackning<br>60         | 290 mm x 172 mm x 95 mm               | 4.74 dm <sup>3</sup>  | 498.00 g   |
| 4052899607972 | PL-LIN-Z6 245-940<br>62X20-HV      | Transportförpackning<br>60         | 290 mm x 172 mm x 95 mm               | 4.74 dm <sup>3</sup>  | 498.00 g   |
| 4052899607989 | PL-LIN-Z6 275-930<br>70X20-LV      | Transportförpackning<br>60         | 290 mm x 172 mm x 95 mm               | 4.74 dm <sup>3</sup>  | 466.00 g   |
| 4052899607996 | PL-LIN-Z6 275-940<br>70X20-LV      | Transportförpackning<br>60         | 290 mm x 172 mm x 95 mm               | 4.74 dm <sup>3</sup>  | 466.00 g   |
| 4052899606760 | PL-LIN-Z6 1100-930<br>280X20-LV/HV | Transportförpackning<br>60         | 592 mm x 252 mm x 100 mm              | 14.92 dm <sup>3</sup> | 1632.00 g  |
| 4052899606777 | PL-LIN-Z6 1100-940<br>280X20-LV/HV | Transportförpackning<br>60         | 592 mm x 252 mm x 100 mm              | 14.92 dm <sup>3</sup> | 1632.00 g  |
| 4052899606784 | PL-LIN-Z6 1100-950<br>280X20-LV/HV | Transportförpackning<br>60         | 592 mm x 252 mm x 100 mm              | 14.92 dm <sup>3</sup> | 1632.00 g  |
| 4052899606791 | PL-LIN-Z6 2000-930<br>280X20-LV/HV | Transportförpackning<br>60         | 592 mm x 252 mm x 100 mm              | 14.92 dm <sup>3</sup> | 1632.00 g  |
| 4052899606807 | PL-LIN-Z6 2000-940<br>280X20-LV/HV | Transportförpackning<br>60         | 592 mm x 252 mm x 100 mm              | 14.92 dm <sup>3</sup> | 1632.00 g  |

Logistiska data

|               |                                    |                            |                          |                       |           |
|---------------|------------------------------------|----------------------------|--------------------------|-----------------------|-----------|
| 4052899606814 | PL-LIN-Z6 2000-950<br>280X20-LV/HV | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 1632.00 g |
| 4052899606883 | PL-LIN-Z6 2200-930<br>560X20-HV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |
| 4052899606821 | PL-LIN-Z6 2200-930<br>560X20-LV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |
| 4052899606890 | PL-LIN-Z6 2200-940<br>560X20-HV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |
| 4052899606838 | PL-LIN-Z6 2200-940<br>560X20-LV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |
| 4052899606906 | PL-LIN-Z6 2200-950<br>560X20-HV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |
| 4052899606845 | PL-LIN-Z6 2200-950<br>560X20-LV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |
| 4052899606913 | PL-LIN-Z6 4000-930<br>560X20-HV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |
| 4052899606852 | PL-LIN-Z6 4000-930<br>560X20-LV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |
| 4052899606920 | PL-LIN-Z6 4000-940<br>560X20-HV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |
| 4052899606869 | PL-LIN-Z6 4000-940<br>560X20-LV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |
| 4052899606937 | PL-LIN-Z6 4000-950<br>560X20-HV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |
| 4052899606876 | PL-LIN-Z6 4000-950<br>560X20-LV    | Transportförpackning<br>60 | 592 mm x 252 mm x 100 mm | 14.92 dm <sup>3</sup> | 2838.00 g |

Produktkoden gäller minsta tillåtna beställningskvantitet. En transportförpackning kan innehålla en eller flera produkter. Vid orderläggning, vänligen ange en eller flera transportförpackningar.

Friskrivningsklausul

Kan ändras utan föregående notifiering. Felaktigheter och försummelse undantagna. Se alltid till att använda den senaste utgåvan.