


TEC FLEX Tunable White Protect

LED-moduler för semi-professionella program

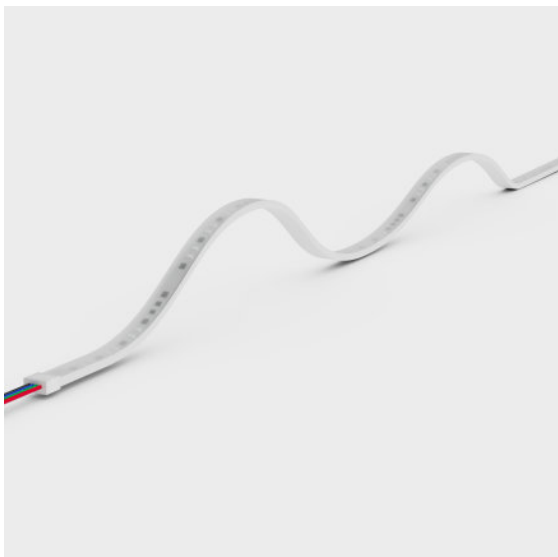

Produktegenskaper

- Flexibel klippbar LED list
- Color consistency in 3 SDCM
- Up to 50,000 hrs lifetime @ tc max

Produktfördelar

- Enkel montering på många släta ytor tack vare självhäftande tejp på baksidan

Användningsområde

- Dynamisk stämningsbelysning



Tekniska data

Elektriska data

Produktbeskrivning	Nominell märkspänning	Strömtyp	Märkeffekt	Inspänningso mråde	Accidental reverse input voltage protection up to
TFP2000TW -G1-827.865-05	240 V	Direkt ström (DC)	5400 W	23...25 V	25 V


Fotometrisk data

Produktbeskrivning	Ljutfärg LED	Färgåterg ivningsindex Ra	Ljusutbyte	Ljutfärg (angiven)
TFP2000TW -G1-827.865-05	Dynamic White	80	1348 lm/W	Dynamic White

Mått

Produktbeskrivning	Längd	produktvikt
TFP2000TW -G1-827.865-05	50000 mm	30500 g

Produktskiss med nummer

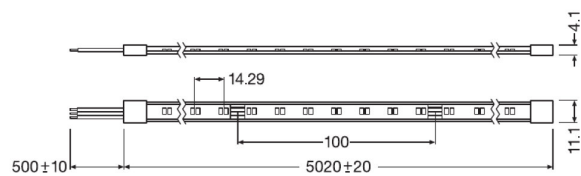

TFP2000TW -G1-827.865-05

Temperaturer och driftsförhållanden

Produktbeskrivning	Temperaturområde vid Tc punkten	Förvaringstemperatur
TFP2000TW -G1-827.865-05	-25...80 °C	-30...85 °C

Tillägg produktdata

Produktbeskrivning	ID of contained light source [AGGR]
TFP2000TW -G1-827.865-05	LS_SHZ_600421

Certifikat och Standarder

Produktbeskrivning	Energy efficiency class of the contained light source
TFP2000TW -G1-827.865-05	E

Logistikdata

Produktbeskrivning	Statistiskt varunummer
TFP2000TW -G1-827.865-05	85395100000

Environmental information
Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Produktbeskrivning	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
TFP2000TW -G1-827.865-05	07-07-2023	4062172154260	Lead
Produktbeskrivning	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
TFP2000TW -G1-827.865-05	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	1d23825e-b60c-4620-8cdd-ed4bd7558210

Appliktionsråd

För mer detaljerad applikationsinformation och grafik, vänligen se produktdatablad

Försäljning och teknisk support

Försäljning och teknisk support www.osram.se

Download

Dokument	
	User instruction TEC Flex Protect Tunable White, TEC Flex Protect RGB
	Product Datasheet TEC Flex Tunable White IP66 product datasheet (EN)
	Broschyrer Light is strong - Discover the versatile and flexible lighting system OSRAM 24V TEC Flex (EN)
	Certifikat TEC Flex TW CE 4228593 210820
	Certifikat TF(P)2000TW ENEC 071020
	Eulumdat Eulumdat TFP2000TW-LDT
	IES data Eulumdat TFP2000TW-IES

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistiska data

Produktnummer	Produktbeskrivning	Förpackningsenhet (Styck/Enhet)	Dimensioner (längd x bredd x höjd)	Volym	Bruttovikt
4062172154260	TFP2000TW -G1-827.865-05	Transportförpackning 10	280 mm x 305 mm x 180 mm	15.37 dm ³	4024.00 g

Produktkoden gäller minsta tillåtna beställningskvantitet. En transportförpackning kan innehålla en eller flera produkter. Vid orderläggning, vänligen ange en eller flera transportförpackningar.

Valfria tillbehör

Produktbeskrivning	Tillbehörets namn	Tillbehörets kod
TFP2000TW -G1-827.865-05	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP2000TW -G1-827.865-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
TFP2000TW -G1-827.865-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TFP2000TW -G1-827.865-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP2000TW -G1-827.865-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP2000TW -G1-827.865-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP2000TW -G1-827.865-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP2000TW -G1-827.865-05	FX -SC08-G2--BTJ-IP54	▶ 4052899568853

Friskrivningsklausul

Kan ändras utan föregående notifiering. Felaktigheter och försummelse undantagna. Se alltid till att använda den senaste utgåvan.