

TEC Flex Protect IP66 Connector

Tillbehör för flexibla LED-lister

Produktegenskaper

- Quick and easy installation
- Compatible with TEC Flex



Produktfördelar


- Enkel installation, inga verktyg eller lödning krävs (CONNECTsystem)
- Minskad installationstid (CONNECTsystem)
- Kan vara ansluten till den främre delen av modulen eller vid delningspunkter (CONNECTsystem)
- Låg profil (CONNECTsystem)

Datablad produktfamilj


Tekniska data

Produktbeskrivning	Mått		Tillägg produktdata		Logistikdata
	Längd	produktvikt	Produkten ersätts av EAN	Produkten ersätts av EAN	Statistiskt varunummer
FX -SC08-G2-C2PF-IP54-0500	5100 mm	830 g	4052899533516		85444290900
FX -SC08-G2--BTJ-IP54	300 mm	400 g	4052899464919	4052899568853	85444290900
FX -SC08-G2-CT4PJ	9,0 mm	0,80 g			85366990990


Produktbeskrivning	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)			
	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
FX -SC08-G2-C2PF-IP54-0500	12-02-2022	4052899464889 4052899488236	No declarable substances contained	In work
FX -SC08-G2--BTJ-IP54	12-02-2022	4052899464919 4052899568853	No declarable substances contained	In work
FX -SC08-G2-CT4PJ	30-08-2022	4052899464858	No declarable substances contained	No declarable substances contained

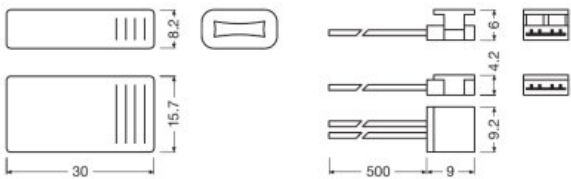


343564_SLMCONNECTsystem FLEX, LF-2PIN Flex IP SC

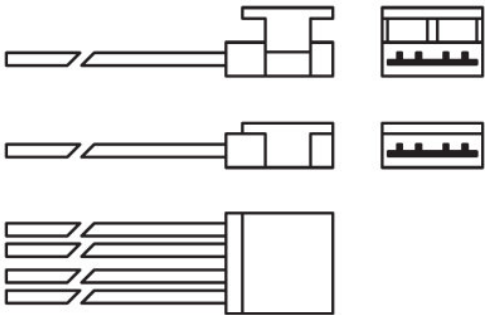


343569_SLMCONNECTsystem FLEX, LF-4PIN Flex SC

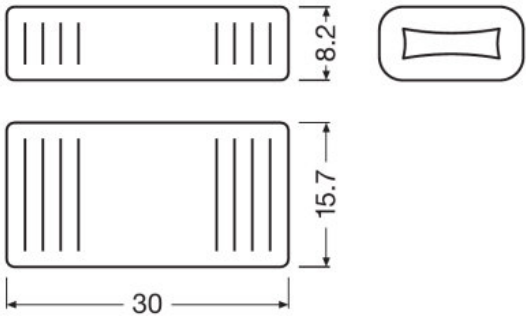


343555_SLMCONNECTsystem FLEX, LF-CONN Flex IP SC

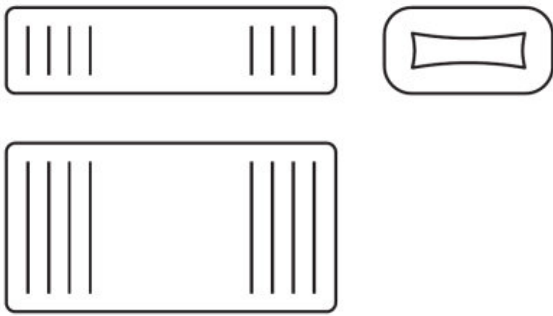

343578_SLMCONNECTsystem FLEX, LF-CONN Flex IP SC




729184_ACC LECV LF B2B Conn. 12,7 5 3 G2



729196_ACC LECV LF B2B Conn. 12,7 5 3 G2

Datablad produktfamilj



729327_FX-SC08-G2_CT4PJ 50XFS25

Appliaktionsråd

För mer detaljerad applikationsinformation och grafik, vänligen se produktdatablad

Försäljning och teknisk support

Försäljning och teknisk support www.osram.se

Download

Dokument	
	Broschyrer Light is freedom of design (EN)
	User instruction Connection System for LINEARlight Flex & TEC Flex IP00
	Product Datasheet 726951_SLIMCONNECT SYSTEM 08 G2

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistiska data

Produktnummer	Produktbeskrivning	Förpackningsenhet (Styck/Enhet)	Dimensioner (längd x bredd x höjd)	Volym	Bruttovikt
4052899464889	FX -SC08-G2-C2PF-IP54-0500	Transportförpackning 280	510 mm x 340 mm x 315 mm	54.62 dm ³	5897.00 g
4052899568853	FX -SC08-G2--BTJ-IP54	Transportförpackning 250	258 mm x 168 mm x 84 mm	3.64 dm ³	1132.00 g
4052899464858	FX -SC08-G2-CT4PJ	Transportförpackning 1250	510 mm x 340 mm x 315 mm	54.62 dm ³	3914.00 g

Produktkoden gäller minsta tillåtna beställningskvantitet. En transportförpackning kan innehålla en eller flera produkter. Vid orderläggning, vänligen ange en eller flera transportförpackningar.

Friskrivningsklausul

Kan ändras utan föregående notifiering. Felaktigheter och försummelse undantagna. Se alltid till att använda den senaste utgåvan.