

## Corner surface slim profile 19x19 mm

Tillbehör för flexibla LED-listor

### Produktegenskaper

- Compatible with TEC Flex



### Produktfördelar

- Aluminium profil robust och korrosionsbeständiga tack vare anodisering


Datablad produktfamilj

Tekniska data


|                           | Mått    |             | Logistikdata           | Environmental information<br>Information according Art. 33 of<br>EU Regulation (EC) 1907/2006 (REACH) |
|---------------------------|---------|-------------|------------------------|-------------------------------------------------------------------------------------------------------|
| Produktbeskrivning        | Längd   | produktvikt | Statistiskt varunummer | Date of Declaration                                                                                   |
| FX-QMS-G1 -EFGP-T45D19H19 | 260 mm  | 080 g       | 39269097900            | 30-08-2022                                                                                            |
| FX-QMS-G1 -BMZI-T45D19H19 | 200 mm  | 143 g       | 76169990990            | 30-08-2022                                                                                            |
| FX-QMS-G1 -EFGH-T45D19H19 | 190 mm  | 100 g       | 39269097900            | 11-02-2022                                                                                            |
| FX-QMS-G1 -CFDB-300       | 3000 mm | 5175 g      | 39169050900            | 30-08-2022                                                                                            |
| FX-QMS-G1 -CFTL-300       | 3000 mm | 5850 g      | 39269097900            | 11-02-2022                                                                                            |

| Produktbeskrivning        | Primary Article Identifier | Candidate List Substance 1         | Declaration No. in SCIP database   |
|---------------------------|----------------------------|------------------------------------|------------------------------------|
| FX-QMS-G1 -EFGP-T45D19H19 | 4052899450028              | No declarable substances contained | No declarable substances contained |
| FX-QMS-G1 -BMZI-T45D19H19 | 4052899446960              | No declarable substances contained | No declarable substances contained |
| FX-QMS-G1 -EFGH-T45D19H19 | 4052899999862              | No declarable substances contained | No declarable substances contained |
| FX-QMS-G1 -CFDB-300       | 4052899446991              | No declarable substances contained | No declarable substances contained |
| FX-QMS-G1 -CFTL-300       | 4052899999749              | No declarable substances contained | No declarable substances contained |


Datablad produktfamilj

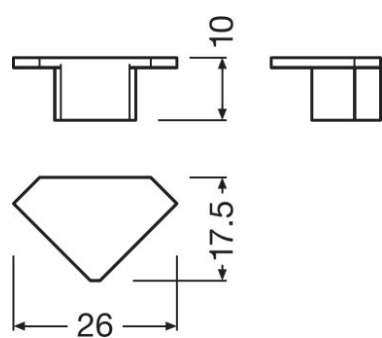


729009\_FX-QMS-G1-EFGP-T45D19H19

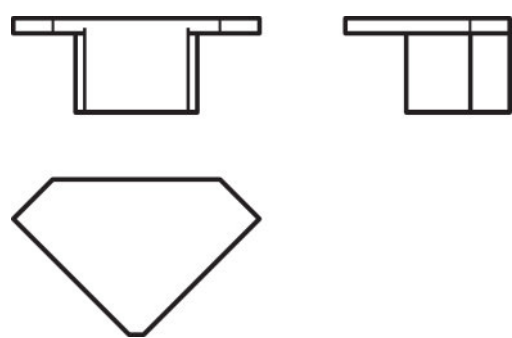

729077\_FX-QMS-G1-EFGP-T45D19H19

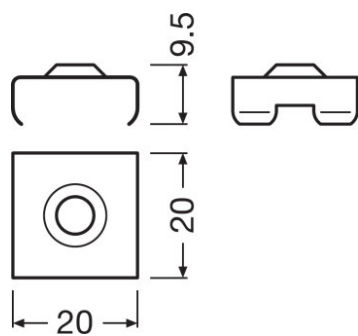

729003\_FX-QMS-G1-BMZI-T45D19H19

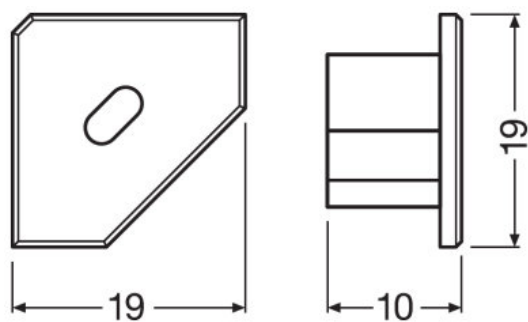

FX-QMS-G1-EFGH-T45D19H19



729001\_FX-QMS-G1-CFDB-300



729069\_FX-QMS-G1-CFDB-300

Datablad produktfamilj



FX-QMS-G1-CFTL-300

Appliktionsråd

För mer detaljerad applikationsinformation och grafik, vänligen se produktdatablad

Försäljning och teknisk support

Försäljning och teknisk support [www.osram.se](http://www.osram.se)

Download

| Dokument                                                                            |                                                                                  |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|  | Product Datasheet<br>Specification Sheet Slim Track FX-QMS-G1-T45D19H19-300 (EN) |
|  | Broschyrer<br>Light is freedom of design (EN)                                    |
|  | Product Datasheet<br>Specification Sheet Slim Track FX-QMS-G1-TU15H6-300 (EN)    |
|  | Product Datasheet<br>Specification Sheet Slim Track FX-QMS-G1-TU15H6W3-300 (EN)  |
|  | Product Datasheet<br>Specification Sheet Slim Track FX-QMS-G1-TU16H12LS-300 (EN) |
|  | Product Datasheet<br>Specification Sheet Slim Track FX-QMS-G1-TU16H12W3-300 (EN) |
|  | Product Datasheet<br>Specification Sheet Slim Track FX-QMS-G1-TU16H12-300 (EN)   |
|  | Product Datasheet<br>Specification Sheet Wide Profile FX-QMS-G1-TR19H16-300      |

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistiska data

| Produktnummer | Produktbeskrivning        | Förpackningsenhet (Styck/Enhet) | Dimensioner (längd x bredd x höjd) | Volym                  | Bruttovikt |
|---------------|---------------------------|---------------------------------|------------------------------------|------------------------|------------|
| 4052899450028 | FX-QMS-G1 -EFGP-T45D19H19 | Transportförpackning 400        | 175 mm x 145 mm x 110 mm           | 2.79 dm <sup>3</sup>   | 426.00 g   |
| 4052899446960 | FX-QMS-G1 -BMZI-T45D19H19 | Transportförpackning 400        | 175 mm x 145 mm x 110 mm           | 2.79 dm <sup>3</sup>   | 676.00 g   |
| 4052899999862 | FX-QMS-G1 -EFGH-T45D19H19 | Transportförpackning 400        | 175 mm x 145 mm x 100 mm           | 2.54 dm <sup>3</sup>   | 506.00 g   |
| 4052899446991 | FX-QMS-G1 -CFDB-300       | Transportförpackning 40         | 3060 mm x 225 mm x 225 mm          | 154.91 dm <sup>3</sup> | 3293.00 g  |
| 4052899999749 | FX-QMS-G1 -CFTL-300       | Transportförpackning 40         | 3020 mm x 80 mm x 30 mm            | 7.25 dm <sup>3</sup>   | 2880.00 g  |

Produktkoden gäller minsta tillåtna beställningskvantitet. En transportförpackning kan innehålla en eller flera produkter. Vid orderläggning, vänligen ange en eller flera transportförpackningar.

Friskrivningsklausul

Kan ändras utan föregående notifiering. Felaktigheter och försummelse undantagna. Se alltid till att använda den senaste utgåvan.