

BASIC FLEX Shortpitch IP00

LED-moduler för semi-professionella program



Produktegenskaper

- 120° viewing angle per module

Produktfördelar

- Lifetime: up to 30,000 h (temperature at max. t_c)
- Available with protection class IP00 and IP66

Användningsområde

- Hotell och restaurang
- Skyltar
- Architectural lighting
- Vägg integration



Datablad produktfamilj

Tekniska data

Produktbeskrivning	Elektriska data					Fotometrisk data
	Nominell märkspänning	Strömtyp	Märkeffekt	Inspänningso mråde	Accidental reverse input voltage protection up to	Ljutfärg LED
BF400S-G3- 827-05	240 V	Direkt ström (DC)	1650 W	23...25 V	24 V	vit
BF400S-G3- 830-05	240 V	Direkt ström (DC)	1650 W	23...25 V	24 V	vit
BF400S-G3- 840-05	240 V	Direkt ström (DC)	1650 W	23...25 V	24 V	vit
BF400S-G3- 865-05	240 V	Direkt ström (DC)	1650 W	23...25 V	24 V	vit
BF1000S-G3- 827-05	240 V	Direkt ström (DC)	3800 W	23...25 V	24 V	vit
BF1000S-G3- 830-05	240 V	Direkt ström (DC)	3800 W	23...25 V	24 V	vit
BF1000S-G3- 840-05	240 V	Direkt ström (DC)	3800 W	23...25 V	24 V	vit
BF1000S-G3- 865-05	240 V	Direkt ström (DC)	3800 W	23...25 V	24 V	vit
BF1500S-G3- 827-05	240 V	Direkt ström (DC)	6200 W	23...25 V	24 V	vit
BF1500S-G3- 830-05	240 V	Direkt ström (DC)	6200 W	23...25 V	24 V	vit
BF1500S-G3- 840-05	240 V	Direkt ström (DC)	6200 W	23...25 V	24 V	vit
BF1500S-G3- 865-05	240 V	Direkt ström (DC)	6200 W	23...25 V	24 V	vit

Produktbeskrivning	Färgåtergivning sin dex Ra	Ljusutbyte	Ljutfärg (angiven)	Mått		Temperaturer och driftsförhållanden
				Längd	produktvikt	Temperaturo mråde vid Tc punkten
BF400S-G3- 827-05	80	1164 lm/W	Warm White	50000 mm	8500 g	-20...75 °C
BF400S-G3- 830-05	80	1212 lm/W	Warm White	50000 mm	8500 g	-20...75 °C
BF400S-G3- 840-05	80	1273 lm/W	Neutral vit	50000 mm	8500 g	-20...75 °C
BF400S-G3- 865-05	80	1236 lm/W	Cool White	50000 mm	8500 g	-20...75 °C
BF1000S-G3- 827-05	80	1066 lm/W	Warm White	50000 mm	8500 g	-20...75 °C
BF1000S-G3- 830-05	80	1113 lm/W	Warm White	50000 mm	8500 g	-20...75 °C
BF1000S-G3- 840-05	80	1184 lm/W	Neutral vit	50000 mm	8500 g	-20...75 °C
BF1000S-G3- 865-05	80	1161 lm/W	Cool White	50000 mm	8500 g	-20...75 °C
BF1500S-G3- 827-05	80	1052 lm/W	Warm White	50000 mm	8500 g	-20...75 °C

				Mått		Temperaturer och driftsförhållanden
Produktbeskrivning	Färgåtergivningssindex Ra	Ljusutbyte	Ljuskval (angivet)	Längd	produktvikt	Temperaturområde vid Tc punkten
BF1500S-G3- 830-05	80	1089 lm/W	Warm White	50000 mm	8500 g	-20...75 °C
BF1500S-G3- 840-05	80	111 lm/W	Neutral vit	50000 mm	8500 g	-20...75 °C
BF1500S-G3- 865-05	80	1097 lm/W	Cool White	50000 mm	8500 g	-20...75 °C


		Tillägg produktdata	Användningsområden	Certifikat och Standarder
Produktbeskrivning	Förvaringstemperatur	ID of contained light source [AGGR]	Ljusreglerbar	Standarder
BF400S-G3- 827-05	-30...80 °C	LS_SHZ_600903	Ja	CE
BF400S-G3- 830-05	-30...80 °C	LS_SHZ_600904	Ja	CE
BF400S-G3- 840-05	-30...80 °C	LS_SHZ_600905	Ja	CE
BF400S-G3- 865-05	-30...80 °C	LS_SHZ_600906	Ja	CE
BF1000S-G3- 827-05	-30...80 °C	LS_SHZ_600919	Ja	CE
BF1000S-G3- 830-05	-30...80 °C	LS_SHZ_600920	Ja	CE
BF1000S-G3- 840-05	-30...80 °C	LS_SHZ_600921	Ja	CE
BF1000S-G3- 865-05	-30...80 °C	LS_SHZ_600922	Ja	CE
BF1500S-G3- 827-05	-30...80 °C	LS_SHZ_600927	Ja	CE
BF1500S-G3- 830-05	-30...80 °C	LS_SHZ_600928	Ja	CE
BF1500S-G3- 840-05	-30...80 °C	LS_SHZ_600929	Ja	CE
BF1500S-G3- 865-05	-30...80 °C	LS_SHZ_600930	Ja	CE

		Logistikdata	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Produktbeskrivning	Energy efficiency class of the contained light source	Statistiskt varunummer	Date of Declaration	Primary Article Identifier
BF400S-G3- 827-05	F	85395100000	23-06-2022	4062172231251
BF400S-G3- 830-05	F	85395100000	23-06-2022	4062172231275
BF400S-G3- 840-05	E	85395100000	23-06-2022	4062172231299
BF400S-G3- 865-05	F	85395100000	23-06-2022	4062172231312
BF1000S-G3- 827-05	F	85395100000	23-06-2022	4062172231459
BF1000S-G3- 830-05	F	85395100000	23-06-2022	4062172231473
BF1000S-G3- 840-05	F	85395100000	23-06-2022	4062172231497
BF1000S-G3- 865-05	F	85395100000	23-06-2022	4062172231510
BF1500S-G3- 827-05	F	85395100000	23-06-2022	4062172231619
BF1500S-G3- 830-05	F	85395100000	23-06-2022	4062172231633
BF1500S-G3- 840-05	F	85395100000	23-06-2022	4062172231657
BF1500S-G3- 865-05	F	85395100000	23-06-2022	4062172231671


Datablad produktfamilj

Produktbeskrivning	Candidate List Substance 1	Declaration No. in SCIP database
BF400S-G3- 827-05	No declarable substances contained	No declarable substances contained
BF400S-G3- 830-05	No declarable substances contained	No declarable substances contained
BF400S-G3- 840-05	No declarable substances contained	No declarable substances contained
BF400S-G3- 865-05	No declarable substances contained	No declarable substances contained
BF1000S-G3- 827-05	No declarable substances contained	No declarable substances contained
BF1000S-G3- 830-05	No declarable substances contained	No declarable substances contained
BF1000S-G3- 840-05	No declarable substances contained	No declarable substances contained
BF1000S-G3- 865-05	No declarable substances contained	No declarable substances contained
BF1500S-G3- 827-05	No declarable substances contained	No declarable substances contained
BF1500S-G3- 830-05	No declarable substances contained	No declarable substances contained
BF1500S-G3- 840-05	No declarable substances contained	No declarable substances contained
BF1500S-G3- 865-05	No declarable substances contained	No declarable substances contained

Datablad produktfamilj

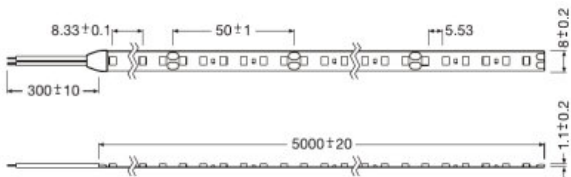

Line drawing of BASIC FLEX G3 short pitch

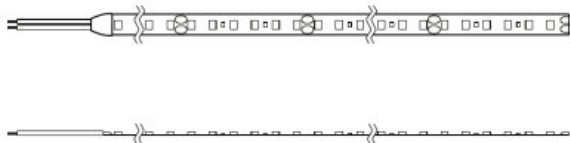

Line drawing of BASIC FLEX G3 short pitch

Appliktionsråd

För mer detaljerad applikationsinformation och grafik, vänligen se produktdatablad

Försäljning och teknisk support

Försäljning och teknisk support www.osram.se

Download

Dokument	
	User instruction Basic Flex G3 Shortpitch IP User Instruction 20210722
	Product Datasheet BASIC Flex G3 Shortpitch (EN)
	Product Datasheet BASIC Flex G3 Shortpitch EMEA (EN)
	Certifikat Basic Flex G3 Shortpitch CB 20210722

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistiska data

Produktnummer	Produktbeskrivning	Förpackningsenhet (Styck/Enhet)	Dimensioner (längd x bredd x höjd)	Volym	Bruttovikt
4062172231251	BF400S-G3- 827-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4897.00 g
4062172231275	BF400S-G3- 830-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4897.00 g
4062172231299	BF400S-G3- 840-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4897.00 g
4062172231312	BF400S-G3- 865-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4897.00 g
4062172231459	BF1000S-G3- 827-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4897.00 g
4062172231473	BF1000S-G3- 830-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4897.00 g
4062172231497	BF1000S-G3- 840-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4897.00 g
4062172231510	BF1000S-G3- 865-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4897.00 g
4062172231619	BF1500S-G3- 827-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4897.00 g
4062172231633	BF1500S-G3- 830-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4897.00 g
4062172231657	BF1500S-G3- 840-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4897.00 g
4062172231671	BF1500S-G3- 865-05	Transportförpackning 40	400 mm x 260 mm x 193 mm	20.07 dm ³	4913.00 g

Produktkoden gäller minsta tillåtna beställningskvantitet. En transportförpackning kan innehålla en eller flera produkter. Vid orderläggning, vänligen ange en eller flera transportförpackningar.

Friskrivningsklausul

Kan ändras utan föregående notifiering. Felaktigheter och försummelse undantagna. Se alltid till att använda den senaste utgåvan.