

BackLED CP G5 – Wire clip

– Monteringsprofiler



Produktegenskaper

- Compatible with BackLED G5 family
- Suitable for BA-TW-CP-G5/BA-XL-CP-G5/ BA-L-CP-G5/BA-M-HO-CP-G5/BA-M-CP-G5/BA-M-CP-G5-HF/ BA-S-CP-G5
- Quick and easy binding without extra tooling

Produktfördelar

- Robust aluminiumprofil

Användningsområde


- Suitable for BA-TW-CP-G5, BA-XL-CP-G5, BA-L-CP-G5, BA-M-HO-CP-G5 , BA-M-CP-G5, BA-M-CP-G5-HF, BA-S-CP-G5

Tekniska data

Mått

Produktbeskrivning	produktvikt	Bredd	Längd
BA -CLIP-L-G5	1,60 g	15,0 mm	16,2 mm
BA -CLIP-SM-G5	1,26 g	15,0 mm	16,2 mm

Produktskiss med nummer

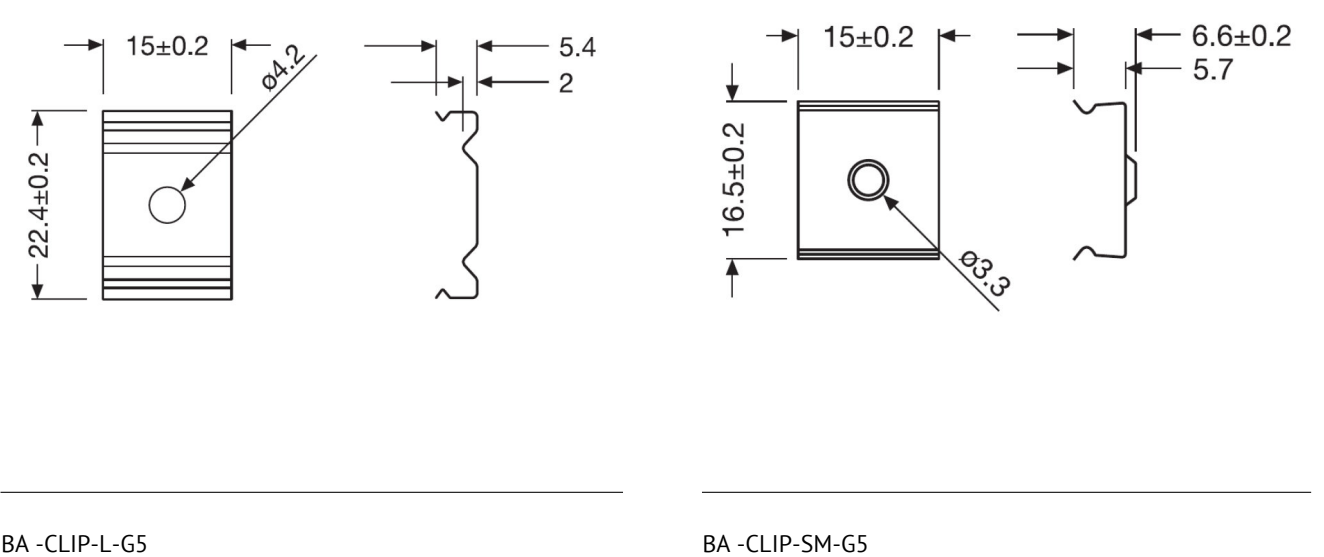

Logistikdata

Produktbeskrivning	Statistiskt varunummer
BA -CLIP-L-G5	76169990990
BA -CLIP-SM-G5	76169990990

Environmental information
Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Produktbeskrivning	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
BA -CLIP-L-G5	27-01-2022	4052899629325	No declarable substances contained
BA -CLIP-SM-G5	27-01-2022	4052899629349	No declarable substances contained

Datablad produktfamilj

Produktbeskrivning	Declaration No. in SCIP database
BA -CLIP-L-G5	No declarable substances contained
BA -CLIP-SM-G5	No declarable substances contained

Appliktionsråd

För mer detaljerad applikationsinformation och grafik, vänligen se produktdatablad

Försäljning och teknisk support

Försäljning och teknisk support www.osram.se

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistiska data

Produktnummer	Produktbeskrivning	Förpackningsenhet (Styck/Enhet)	Dimensioner (längd x bredd x höjd)	Volym	Bruttovikt
4052899629325	BA -CLIP-L-G5	Transportförpackning 500	166 mm x 126 mm x 172 mm	3.60 dm ³	930.00 g
4052899629349	BA -CLIP-SM-G5	Transportförpackning 500	166 mm x 126 mm x 172 mm	3.60 dm ³	760.00 g

Datablad produktfamilj

Logistiska data

Produktkoden gäller minsta tillåtna beställningskvantitet. En transportförpackning kan innehålla en eller flera produkter. Vid orderläggning, vänligen ange en eller flera transportförpackningar.

Friskrivningsklausul

Kan ändras utan föregående notifiering. Felaktigheter och försummelse undantagna. Se alltid till att använda den senaste utgåvan.